

16-/32-/64-Channel 4K ENVRs

HEN16304/HEN16384/HEN32304/HEN32384/HEN323164
HEN64304/HEN643164/HEN643324/HEN643484

Introducing Honeywell's Focus 4K Embedded NVRs, our newest affordable, fully featured NVRs offering Ultra HD 4K video resolution. Choose a 16-, 32-, or 64-channel NVR, with multiple hard drive options plus the ability to expand to up to 64 TB of internal storage, for an ideal and flexible solution to fit your surveillance situation.



Fully-featured NVRs

- High decoding capability for Ultra 4K HD viewing and recording
- View 4/8/16 channels simultaneously with synchronized real-time playback on your monitor (depending on your model)
- Up to 12 MP (4K) resolution live view, preview and playback
- Up to 16 channels at 1080p, or 8 channels at 4 MP, or 4 channels at 8 MP H.265/H.264 decoding
- De-warp fisheye camera video in local and web user interface for 360 degree situational awareness

Easy to Use

- The Quick wizard and PoE support (for up to 16 channels) make setup fast and easy
- Quick physical installation with the help of a simple NVR design and easy-to-understand quick installation guides
- Simple remote configuration and firmware updating through the Honeywell Viewer web client and the Honeywell Config tool

Market Opportunities

The flexible storage options and high recording and networking performance of the Focus 4K Embedded NVRs make these NVRs perfect for a wide range of security applications.

Convenient, Flexible Storage Options

- Internal storage supports 8 HDDs expandable up to 64 TB (8 TB each)
- Store video clips and snapshots to external storage, such as the client's PC, through the Internet connection
- RAID 0/1/5/6/10 external storage compatibility supports a wide range of high capacity storage options
- Store video clips and snapshots to external network storage servers, such as an FTP site
- Store video clips and snapshots to a USB memory device

Dynamic, Accessible Monitoring


- Monitor from anywhere using the mobile apps for both Apple® and Android™ devices (smartphones, tablet computers, and laptops)
- Protect the NVR's video and network setup with password-protected access
- Conceal up to 4 areas of a scene from viewing and recording

FEATURES AND BENEFITS


- | | | | | |
|---|---|--|---|--|
| <ul style="list-style-type: none">• H.265/H.264/MJPEG/MPEG4 codec decoding• 2 HDMI/VGA simultaneous video outputs (the second HDMI output is programmable) | <ul style="list-style-type: none">• Supports up to 16 alarm input channels and 6 alarm relay output channels• Supports sending notifications through email, FTP, and/or HTTP | <ul style="list-style-type: none">• UL listed• Supports recording a video clip of events for distribution• Supports uploading still images at the time of the event through email and/or FTP | <ul style="list-style-type: none">• Configurable to automatically detect and respond to motion in the scene, alarm inputs, and network failure or tampering• Maximum incoming and outgoing bandwidth of 320 Mbps | <ul style="list-style-type: none">• Supports visual or auditory notifications (a flashing light, bell, or siren)• Supports fisheye video de-warping in local and web user interface |
|---|---|--|---|--|

16-/32-/64-Channel 4K ENVRs Technical Specifications

SYSTEM DIAGRAM

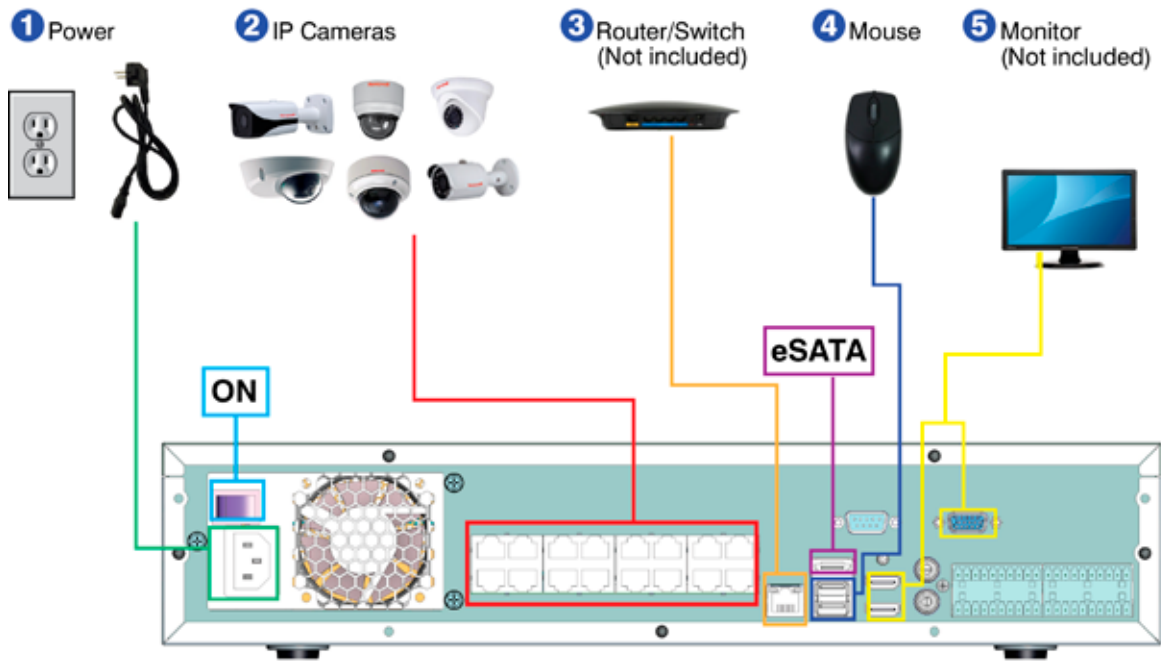

DIMENSIONS

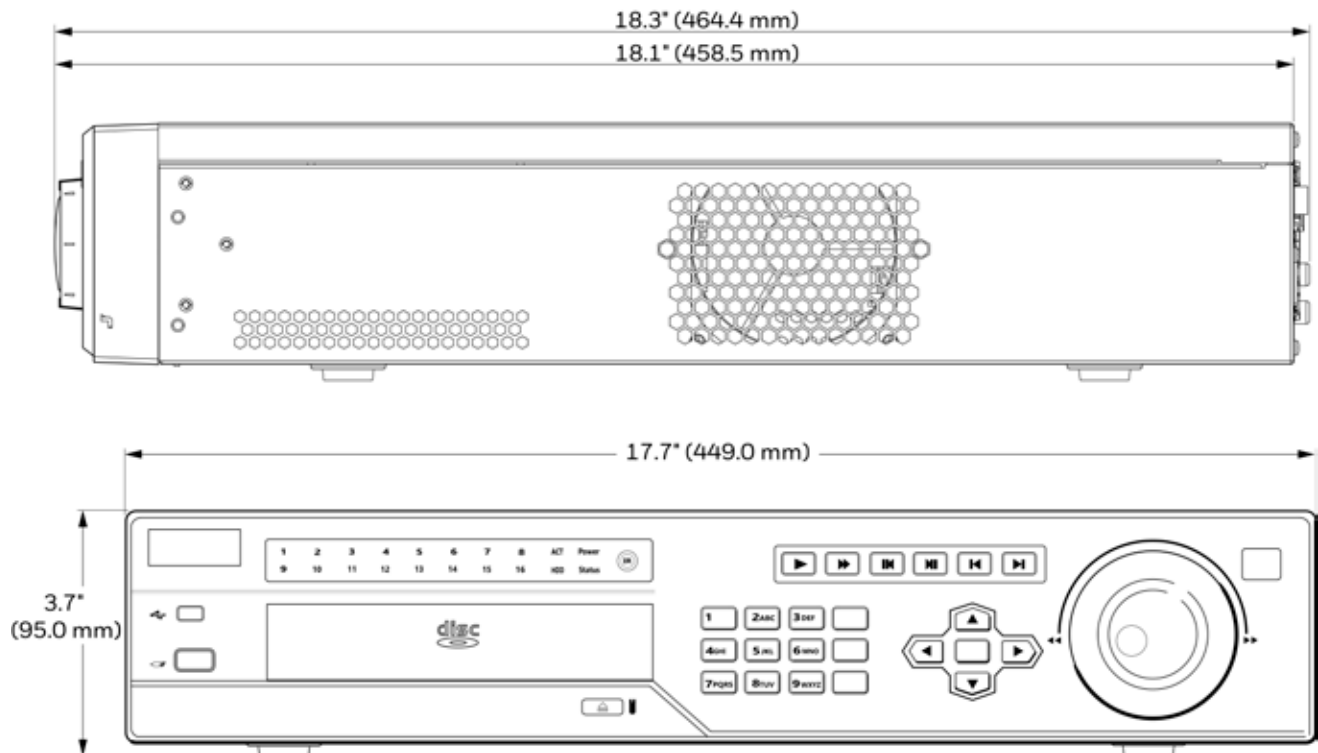

16-/32-/64-Channel 4K ENVRs Technical Specifications

SYSTEM	
MAIN PROCESSOR	Quad-core embedded processor
OPERATING SYSTEM	Embedded LINUX
VIDEO	
INPUTS	HEN163*4: 16 Channels IP HEN323*4: 32 Channels IP HEN643*4: 64 Channels IP
AUDIO	
AUDIO INPUT/OUTPUT	1 Channel Input/1 Channel Output, RCA
TWO-WAY COMMUNICATION	Supported
DISPLAY	
INTERFACE	2 HDMI (1 HDMI up to 3840 × 2160); 1 VGA
RESOLUTION	3840 × 2160; 1920 × 1080; 1280 × 1024; 1280 × 720; 1024 × 768
DISPLAY SPLIT	HEN163*4: 1/4/8/9/16 HEN323*4: 1/4/8/9/16/25/36 HEN643*4: 1/4/8/9/16/25/36
OSD	Camera title; Time; Video loss; Camera lock; Motion detection; Recording
PROGRAMMABLE VIDEO OUTPUT	2nd HDMI output
FISHEYE VIDEO DE-WARPING	Supported in local and web user interface
RECORDING	
COMPRESSION	H.265/H.264/MJPEG/MPEG4
RESOLUTION	12 MP (4000 × 3000); 8 MP (3840 × 2160); 6 MP (3072 × 2048); 5 MP (2560 × 1920); 4 MP (2560 × 1440); 3 MP (2048 × 1520); 1080p (1920 × 1080); 720p (1280 × 720); D1 (704 × 576 / 704 × 480); CIF (352 × 288 / 352 × 240)
FRAME RATE	1–15 fps (12 MP and 8 MP); 1–25/30 fps (rest of the resolutions)
RECORD BIT RATE	320 Mbps
BIT RATE ¹	16 kbps ~ 20 Mbps, per channel
RECORDING MODE	Schedule (Regular/Continuous, Motion Detection, Alarm); Manual; Stop
RECORDING INTERVAL	1 to 120 minutes (default 60 min)
PRE-EVENT RECORDING INTERVAL	1 to 30 seconds
POST-EVENT RECORDING INTERVAL	10 to 300 seconds
VIDEO DETECTION AND ALARMS	
TRIGGER EVENTS	Recording; PTZ; Tour; Alarm; Video Push; Email; FTP; Snapshot; Buzzer
VIDEO DETECTION	Motion Detection—MD Zones: 396 (22 × 18); Video Loss; Camera Blank
ALARM INPUT	16 Channels
RELAY OUTPUT	6 Channels


PLAYBACK AND BACKUP	
SYNC PLAYBACK	1/4/8/16 (maximum 4-ch @ 8MP, 8-ch @ 4MP, or 16-ch @ 1080p simultaneous playback)
SEARCH MODE	Time/Date; Alarm; Motion Detection (MD); Exact Search (accurate to a second); Smart Search
PLAYBACK FUNCTION	Play; Pause; Stop; Rewind; Fast play; Slow play; Next File; Previous File; Next Camera; Previous Camera; Full Screen; Repeat; Shuffle; Backup selection; Digital Zoom
BACKUP MODE COMPATIBILITY	USB Device; Network; Internal SATA burner; eSATA Device
NETWORK	
ETHERNET	1 RJ-45 port (10/100/1000 Mbps)
POE	16 ports (IEEE802.3af/at)
SUPPORTED PROTOCOLS ²	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, IP Search, P2P
MAXIMUM NUMBER OF USERS	128 users
NETWORK THROUGHPUT	Input 320 Mbps; Output 320 Mbps
SMART PHONE COMPATIBILITY	iPhone; iPad; Android
STORAGE	
INTERNAL HDD	8 SATA ports, up to 64 TB
HDD MODE	RAID 0/1/5/6/10
EXTERNAL HDD	1 eSATA port
AUXILIARY INTERFACE	
USB PORTS	4 (2 rear USB3.0; 2 front USB2.0)
RS232	1 port (for PC communications and keyboard)
ELECTRICAL	
POWER SUPPLY	Single, 100~240 VAC, 50/60 Hz
POWER CONSUMPTION	NVRs: 17.5 W max (without HDD) PoE: 25.5 W for a single port (150 W total)
ENVIRONMENTAL	
OPERATING TEMPERATURE	14°F to 131°F (-10°C to 55°C)
RELATIVE HUMIDITY	10% to 90%, non-condensing
STORAGE TEMPERATURE	-4°F to 158°F (-20°C to 70°C), 0% to 90% relative humidity
PHYSICAL	
DIMENSIONS	17.3" × 17.9" × 3.7" (440 mm × 454 mm × 95 mm)
WEIGHT (WITHOUT HDD)	15.4 lb. (7.0 kg)
REGULATORY	
EMISSIONS	FCC Part 15B, EN55032: 2012 +AC: 2013, EN61000-3-2: 2014, EN61000-3-3: 2013
IMMUNITY	EN50130-4: 2011+A1: 2014, EN55024: 2010+A1: 2015
SAFETY	EU: EN60950-1 North America UL listed to UL/CSA 60950-1
ROHS	EN50581: 2012

* The * = hard drive capacity in TB.

1. Actual bitrate is scene and motion dependent with H.264 stream.
2. Some development might be required in specific user cases to support some of these protocols in the field, as naturally protocols will mature over time.

16-/32-/64-Channel 4K ENVRs

RECOMMENDED ACCESSORIES

SYSTEM INTEGRATION	RECOMMENDED CAMERAS
<p>ONVIF support and open API software integration. Refer to www.onvif.org for the ONVIF specification and the Honeywell Open Technology Alliance website (http://www.security.honeywell.com/hota/) to learn more about our open and integrated solutions.</p> 	<p>RUGGED 4K IR MINIDOME IP CAMERAS H4D8PR1</p>
	<p>4K IR BULLET IP CAMERAS HBD8PR1</p>
	<p>4K IR BALL IP CAMERAS HED8PR1</p>
	<p>1080P IR PTZ IP CAMERAS HDZP252DI</p>
	<p>INDOOR 5 MP FISHEYE IP CAMERAS HFD5PR1</p>
	<p>3-INCH INDOOR MINIDOME IP CAMERAS H3W2GR1; H3W2GR2; H3W4GR1</p>
	<p>4-INCH RUGGED MINIDOME IP CAMERAS H4D3PRV2; H4W2PRV2; H4W4PRV2; H4D3PRV3; H4W4PRV3; H4W2GR1; H4W2GR2; H4W4GR1; H4D8GR1</p>
	<p>INDOOR BOX IP CAMERAS HCW2G; HCL2G; HCW4G; HCD8G</p>
	<p>BULLET IP CAMERAS HBD3PR2; HBW2PR2; HBW4PR2; HBW2PR1; HBW4PR1; HBL2GR1; HBW2GR1; HBW2GR3; HBW4GR1; HBD8GR1; HBD1PR1; HBD3PR1</p>
	<p>BALL/MICRO DOME IP CAMERAS H2W2PRV3; H2W4PRV3; HEW2PRW1; HEW4PRW3; HEW2PR1; HEW4PR3; HEW2PR2; HEW4PR2; HED1PR3; HED3PR3</p>

ORDERING

HEN16304	NVR, 16-Channel, H.265, 4K 12 MP, 8 SATA, 16 PoE, 480 fps, 0 TB, RAID 5&6
HEN16384	NVR, 16-Channel, H.265, 4K 12 MP, 8 SATA, 16 PoE, 480 fps, 8 TB, RAID 5&6
HEN32304	NVR, 32-Channel, H.265, 4K 12 MP, 8 SATA, 16 PoE, 960 fps, 0 TB, RAID 5&6
HEN32384	NVR, 32-Channel, H.265, 4K 12 MP, 8 SATA, 16 PoE, 960 fps, 8 TB, RAID 5&6
HEN323164	NVR, 32-Channel, H.265, 4K 12 MP, 8 SATA, 16 PoE, 960 fps, 16 TB, RAID 5&6
HEN64304	NVR, 64-Channel, H.265, 4K 12 MP, 8 SATA, 16 PoE, 1920 fps, 0 TB, RAID 5&6
HEN643164	NVR, 64-Channel, H.265, 4K 12 MP, 8 SATA, 16 PoE, 1920 fps, 16 TB, RAID 5&6
HEN643324	NVR, 64-Channel, H.265, 4K 12 MP, 8 SATA, 16 PoE, 1920 fps, 32 TB, RAID 5&6
HEN643484	NVR, 64-Channel, H.265, 4K 12 MP, 8 SATA, 16 PoE, 1920 fps, 48 TB, RAID 5&6

For more information

www.honeywell.com/security

Honeywell Security and Fire

2700 Blankenbaker Pkwy, Suite 150
Louisville, KY 40299
1.800.323.4576
www.honeywell.com

Honeywell reserves the right, without notification, to make changes in product design or specifications.

L/F4K8HDNVRD/D | 05/17
© 2017 Honeywell International Inc.

Honeywell